

(usually green insulation or bare wire). Fasten each together with a plastic Wire Connector (A) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet junction box DOES NOT have a GROUND WIRE, be sure to insert the green Ground Screw (D) into the Mounting Bracket (B), marked as "GND," facing downward, and wrap the bare ground wire from the fixture around the Green Ground Screw (C). Tighten the screw to clamp ground wire between the ground screw head and Mounting Bracket (B). **IT IS IMPERATIVE THAT THE JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**

7. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white insulation). Fasten each together with a PLASTIC WIRE CONNECTOR (A) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
8. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation). Fasten each together with a

plastic Wire Connector (A) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**

9. Check the wiring connections and if all looks good, gently tuck the wire connections neatly into the ceiling outlet junction box.
10. Slide the Canopy (J) and threaded ring up to the ceiling and secure the Canopy (J) with the Threaded Ring (K).
11. Insert ONE (1) 60-Watt maximum Type A standard medium base incandescent light bulb (not included) or ONE (1) 13-Watt compact fluorescent light bulb (not included) or ONE (1) 9-Watt LED light bulb (not included) into the socket. **Do not exceed specified wattage.**
12. Restore power to ceiling outlet junction box and test fixture.
13. Installation is complete.

## CARE INSTRUCTIONS

- ✓ Wipe clean with a soft, dry cloth or static duster.
- ✓ Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier's finish.



**We can't wait to see what you did with the place. Take before and after pics, then join us by sharing @lumanitylighting on Instagram.**

**LUMANITYLIGHTING.COM**



**LUMANITY**  
**LIGHTING**


## L090-0004 Kingston Chandelier INSTALLATION INSTRUCTIONS

Lumany is lighting for all. But this particular fixture is all yours. With the help of these instructions, DIY stardom is only moments away.

**So get ready. Let's show the world your style.**

## PARTS ENCLOSED

		QTY
A	Wire Connector	3
B	Mounting Bracket	1
C	Mounting Screw	2
D	Ground Screw	1
E	Nipple	1
F	Hex Nut	2
G	Lock Washer	1
H	Swivel	1
I	18" Hanging Rod	1
J	Canopy	1
K	Threaded Ring	1
L	12" Hanging Rod	1
M	6" Hanging Rod	1

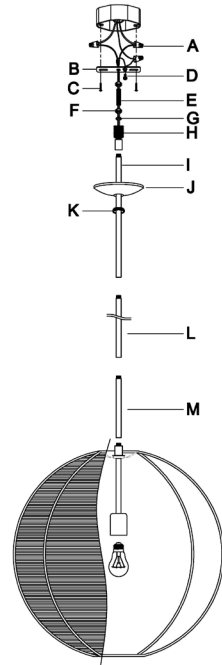

## WARNINGS

- ✓ Before installing the chandelier, make sure the power to the circuit is turned off at the main fuse box/circuit breaker utility box.
- ✓ To reduce the risk of fire, electrical shock or personal injury, always turn off the chandelier and allow it to cool prior to replacing light bulbs.
- ✓ Do not touch the bulbs when the chandelier is turned on. Do not look directly at lit bulb.
- ✓ Keep flammable materials away from lit bulb.

## SAFETY FIRST

- ✓ This chandelier is meant for indoor use, **dry locations only**.
- ✓ Do not use the electric cord to support the weight of the chandelier.
- ✓ These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
- ✓ For your safety, it is strongly recommended that **two** people install the lighting fixture.
- ✓ **This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.**
- ✓ Save these instructions.

## ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

### 1. Shut off the main electrical supply from the main fuse box/circuit breaker.

2. Determine the desired hanging height for the fixture from the ceiling, and use the extension rods (6" M, 12" L, and 18" I) included with the fixture. The extension rods have a coupling on one end and a male thread at the other end. Feed the power supply wire through the extension rods starting from the side with the coupling. After the wire has been fed through the first extension rod, thread the extension nipple protruding from the top of the fixture. If more extension rods are required to achieve the desired height, feed the supply wire through the extension rods and screw these together. Feed the supply wire through the Swivel (H) and screw the Swivel (H) to the end of the last extension rod. Screw the two Hex Nuts (F) onto the Nipple (E) and slide the Lock Washer (G) to one end of the Nipple (E). Feed the supply wire through the Nipple (E), starting from the side where the lock washer was inserted, and screw the end of the Nipple (E) with the lock washer (G) into the Swivel (H). Slide the Threaded Ring (K) and the Canopy (J) over the Threaded Nipple (E), Swivel (H), and extension rods. Screw the Mounting Bracket (B) about 1" onto the Nipple (E), and secure it with one Hex Nut (F). Raise the fixture with the Mounting

Bracket (B) to the junction box and secure the mounting Bracket (B) to the junction box with the Mounting Screws (D).

3. If needed (depending upon the final fixture hanging position from the ceiling), cut off the extra power cord length on the two-wire cord and bare copper ground wire. Make sure when cutting the power cord and bare copper ground wire to cut so that these all are at least 6 inches (152.4 mm) long within the outlet junction box (J-box). Use wire strippers to prepare the ends of the two wires so that there is about 1/2 inch of exposed wire for the Wire Connectors (A).
4. Carefully inspect the chandelier fixture wires. The NEUTRAL FIXTURE WIRE has FINE LONGITUDINAL RIDGES running along its length. The HOT FIXTURE WIRE is SMOOTH, and the GROUND WIRE is bare copper. If you have any doubt and cannot identify the power supply wires with confidence, then we recommend that you ask an electrician and that you not continue with the installation.
5. Gently pull the existing wire down from the ceiling junction box and allow wires to hang. The HOT or LIVE wire is usually black. The NEUTRAL wire is usually white. Check to see if there is a ground wire, usually green or green with a yellow stripe or exposed copper metal wire. If needed, use a pair of wire strippers to remove about 1/2 inches of insulation from each wire.
6. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the ceiling outlet junction box