

or is bare wire. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. If the ceiling outlet junction box does not have a ground junction box wire, insert the Ground Screw (D) into the Mounting Bracket (B) where it's marked "Ground" facing downward, and wrap the fixture ground wire around the Ground Screw (D).

12. Tighten the Ground Screw (D) to clamp the Ground Fixture Wire between the head of the Ground Screw (D) and the Mounting Bracket (B). **It is imperative that the ceiling outlet junction box in your home be properly grounded!**
13. Connect the neutral fixture wire to the neutral junction box wire; it usually has white insulation around it. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure no wire strands are exposed.
14. Connect the hot fixture wire to hot junction box wire; it usually has black insulation around it. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make

sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.

15. Gently tuck the wire connections neatly into ceiling outlet junction box.
16. Place the Canopy (H) over the ceiling outlet junction box and secure it in place by screwing the Threaded Ring (K) onto the Screw Collar Loop (I).
17. Place the Candle Sleeves (N) over the sockets.
18. Insert FIVE (5) 25-Watt maximum Type B candelabra base incandescent light bulbs (not included) or FIVE (5) 6-Watt compact fluorescent light bulbs (not included) or FIVE (5) 4-Watt LED light bulbs (not included) into the sockets. **Do not exceed specified wattage.**
19. Screw the Threaded Rod (O) onto the bottom of chandelier body until secure. Put the Cone Cover (P) over the Threaded Rod (O) and secure it by tightening the Finial (Q).
20. Restore the power to junction box and test the fixture.
21. Installation is now completed.

CARE INSTRUCTIONS

- ✓ Wipe clean with a soft, dry cloth or static duster.
- ✓ Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier's finish.



We can't wait to see what you did with the place. Take before and after pics, then join us by sharing @lumanitylighting on Instagram.

LUMANITYLIGHTING.COM



LUMANITY
LIGHTING

L090-0002 Rhodes Chandelier INSTALLATION INSTRUCTIONS

Lumanity is lighting for all. But this particular fixture is all yours. With the help of these instructions, DIY stardom is only moments away.


So get ready. Let's show the world your style.

PARTS ENCLOSED

		QTY
A	Wire Connector	3
B	Mounting Bracket	1
C	Mounting Screw	2
D	Ground Screw	1
E	Nipple	1
F	Hex Nut	2
G	Lock Washer	1
H	Canopy	1
I	Screw Collar Loop	1
J	Quick Link	1
K	Threaded Ring	1
L	Chain	1
M	Fixture Loop	1
N	Candle Sleeves	5
O	Threaded Rod	1
P	Cone Cover	1
Q	Finial	1

WARNINGS

- ✓ Before installing the chandelier, make sure the power to the circuit is turned off at the main fuse box/circuit breaker utility box.
- ✓ To reduce the risk of fire, electrical shock or personal injury, always turn off the chandelier and allow it to cool prior to replacing light bulbs.
- ✓ Do not touch the bulbs when the chandelier is turned on. Do not look directly at lit bulb.
- ✓ Keep flammable materials away from lit bulb.

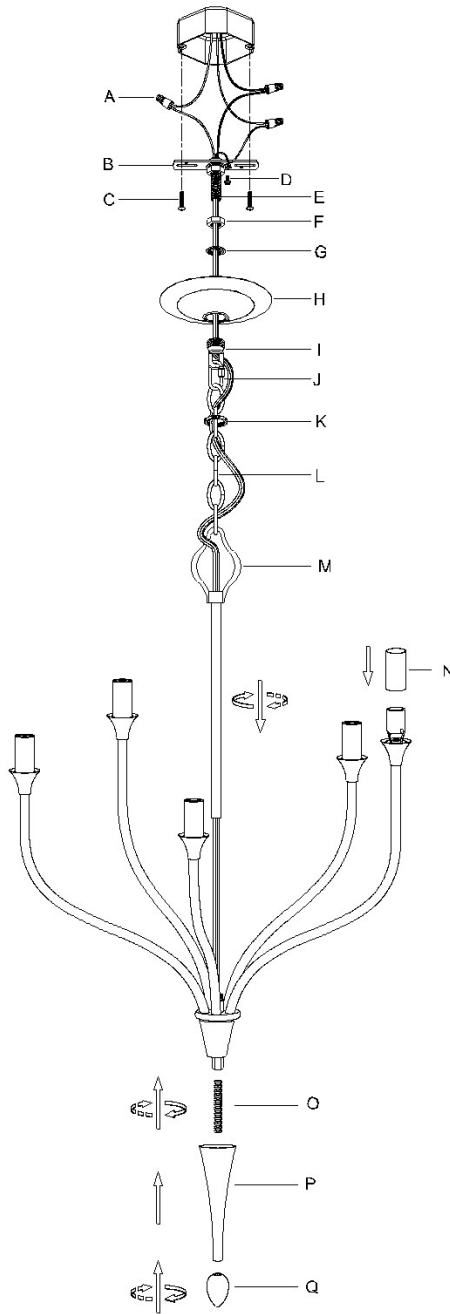

SAFETY FIRST

- ✓ This chandelier is meant for indoor use, **dry locations only**.
- ✓ Do not use the electric cord to support the weight of the chandelier.
- ✓ These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
- ✓ For your safety, it is strongly recommended that **two** people install the lighting fixture.
- ✓ **This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.**
- ✓ Save these instructions.

ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

1. **Shut off the main electrical supply from the main fuse box/circuit breaker.**
2. Attach the Fixture Loop (M) to the center threaded pipe of chandelier body. Screw it in until tightened.
3. Attach the Mounting Bracket (B) onto the ceiling outlet box using Mounting Screw (C). Tighten screws with a screwdriver until secure.
4. Screw the Hex Nuts (F) onto the Nipple (E), then slide the Lock Washer (G) over the lower end of the Nipple (E), and thread the Collar Loop (H) over the same end of the Nipple (E) where the Lock Washer (G) was installed.
5. Thread the Nipple (E) into the Mounting Bracket (B) and secure it with one Hex

Nut (F), exposing approximately 2" of its thread.

6. Slide the Canopy (H) and the Threaded Ring (K) down the Chain (L).
7. Connect Chain (L) to Screw Collar Loop (I) by using the Quick Link (J). Close the opening of the Quick Link (J) by screwing the nut clockwise.
8. Feed the power supply cord through the bottom opening of the Screw Collar Loop (I) and through the Nipple (E).
9. Gently pull the existing ground, hot, and neutral junction box wires down from ceiling junction box and allow these to hang.
10. Carefully inspect the chandelier wires. The neutral fixture wire is ribbed. The hot fixture wire is smooth, and the ground fixture wire is bare copper.
11. Attach the ground wire from the fixture to the ground junction box wire; it usually has green insulation around it