

usually has green insulation around it or is bare wire. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. If the ceiling outlet junction box does not have a ground junction box wire, insert the Ground Screw (D) into the Mounting Bracket (B) where it's marked "Ground" facing downward and wrap the fixture ground wire around the Ground Screw (D).

13. Tighten the Ground Screw (D) to clamp the Ground Fixture Wire between the head of the Ground Screw (D) and the Mounting Bracket (B). **It is imperative that the ceiling outlet junction box in your home be properly grounded!**
14. Connect the neutral fixture wire to the neutral junction box wire; it usually has white insulation around it. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure no wire strands are exposed.
15. Connect the hot fixture wire to the hot junction box wire; it usually has black insulation around it. Fasten these together with a Wire Connector (A) and wrap the

connection with electrical tape. Make sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.

16. Gently tuck the wire connections neatly into ceiling outlet junction box.
17. Place the Canopy (H) over the ceiling outlet junction box and secure it in place by screwing the Threaded Ring (K) onto the Screw Collar Loop (I).
18. Insert TWO (2) 25-Watt maximum Type A standard medium base incandescent light bulbs (not included) or TWO (2) 6-Watt compact fluorescent light bulbs (not included) or TWO (2) 4-watt LED light bulbs (not included) into the sockets. **Do not exceed specified wattage.**
19. Attach the Glass Diffuser (Q) and then the Metal Disc (R) to the bottom of Center Pipe (P). The smooth side of the Glass Diffuser (Q) faces downward. Secure the Glass Diffuser (Q) and Metal Disc (R) by tightening the Finial (S).
20. Restore the power to junction box and test the fixture.
21. Installation is now completed.

CARE INSTRUCTIONS

- ✓ Wipe clean with a soft, dry cloth or static duster.
- ✓ Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier's finish.



We can't wait to see what you did with the place. Take before and after pics, then join us by sharing @lumanitylighting on Instagram.

LUMANITYLIGHTING.COM



LUMANITY
LIGHTING

L090-0008 Sullivan Chandelier INSTALLATION INSTRUCTIONS

Lumanity is lighting for all. But this particular fixture is all yours. With the help of these instructions, DIY stardom is only moments away.


So get ready. Let's show the world your style.

PARTS ENCLOSED

		QTY
A	Wire Connector	3
B	Mounting Bracket	1
C	Mounting Screw	2
D	Ground Screw	1
E	Nipple	1
F	Hex Nut	2
G	Lock Washer	1
H	Canopy	1
I	Screw Collar Loop	1
J	Quick Link	1
K	Threaded Ring	1
L	Chain	1
M	Fixture Loop	1
N	Fabric Shade	1
O	Shade Locker	1
P	Center Pipe	1
Q	Glass Diffuser	1
R	Metal Disc	1
S	Finial	1

WARNINGS

- ✓ Before installing the chandelier, make sure the power to the circuit is turned off at the main fuse box/circuit breaker utility box.
- ✓ To reduce the risk of fire, electrical shock or personal injury, always turn off the chandelier and allow it to cool prior to replacing light bulbs.
- ✓ Do not touch the bulbs when the chandelier is turned on. Do not look directly at lit bulb.
- ✓ Keep flammable materials away from lit bulb.

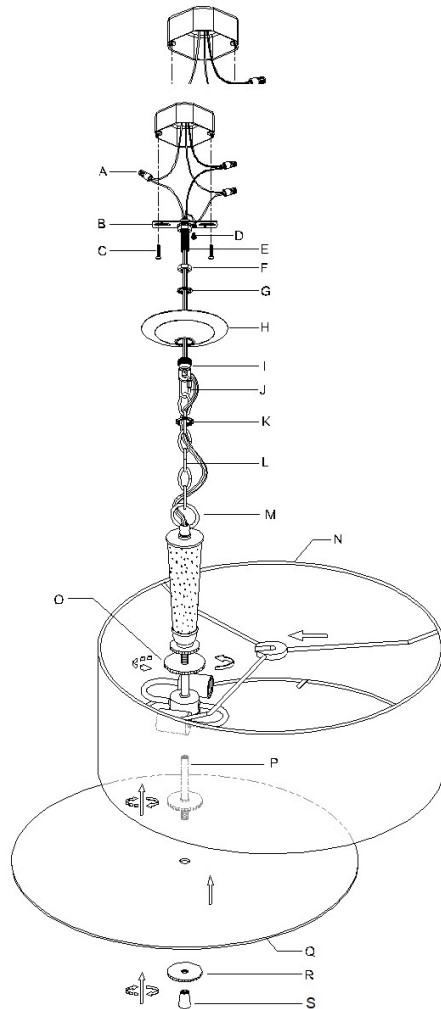

LUMANITYLIGHTING.COM

SAFETY FIRST

- ✓ This chandelier is meant for indoor use, **dry locations only**.
- ✓ Do not use the electric cord to support the weight of the chandelier.
- ✓ These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
- ✓ For your safety, it is strongly recommended that **two** people install the lighting fixture.
- ✓ **This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.**
- ✓ Save these instructions.

ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

- 1. Shut off the main electrical supply from the main fuse box/circuit breaker.**
- 2.** Screw the Center Pipe (P) in the bottom of the 2-light cluster.
- 3.** Put the Fabric Shade (N) on the Shade Locker (O). Turn the Shade Locker (O) anti-clockwise until Fabric Shade (N) is secured.
- 4.** Attach the Mounting Bracket (B) onto the ceiling outlet box using the Mounting Screw (C). Tighten the screws with a screwdriver until secure.
- 5.** Screw the Hex Nuts (F) onto the Nipple (E), then slide the Lock Washer (G) over the lower end of the Nipple (E), and thread the Collar Loop (H) over the same end of the Nipple (E) where the Lock Washer (G) was installed.
- 6.** Thread the Nipple (E) into the Mounting
- Bracket (B) and secure it with one Hex Nut (F), exposing approximately 2" of its thread.
- 7.** Unwrap the power supply cord to the fixture with the ground wire and unwrap the Chain (L). Starting from the Fixture Loop (M), lace the power supply cord and ground wire through every other link of the Chain (L) to the end of the Chain (L).
- 8.** Slide the Canopy (H) and the Threaded Ring (K) down the Chain (L).
- 9.** Connect the Chain (L) to Screw Collar Loop (I) by using the Quick Link (J). Close the opening of the Quick Link (J) by screwing the nut clockwise.
- 10.** Feed the power supply cord through the bottom opening of the Screw Collar Loop (I) and through the Nipple (E).
- 11.** Gently pull the existing ground, hot, and neutral junction box wires down from the ceiling junction box and allow these to hang.
- 12.** Attach the ground wire from the fixture to the ground junction box wire; it